


洋芋片整廠設備 POTATO CHIPS PRODUCTION LINE



生產流程 FLOW CHART

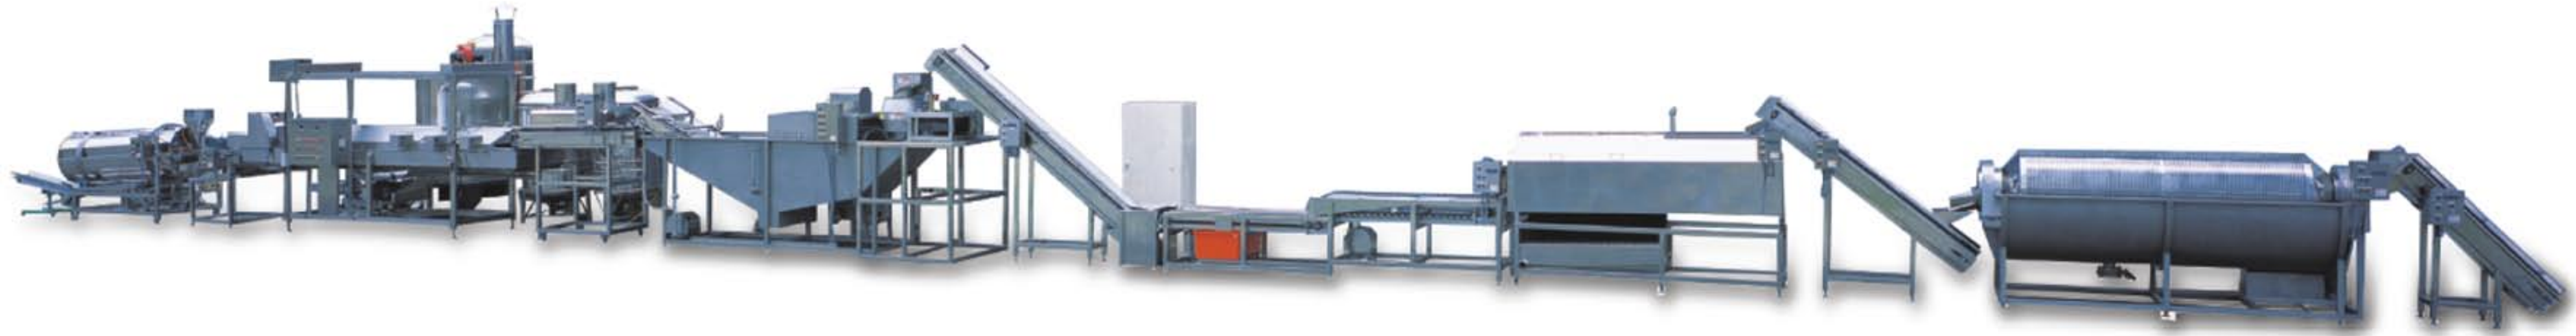

成品產能：

- 100公斤/小時、300公斤/小時、500公斤/小時
(每小時100公斤生產線之廠房設施參考)
- ◎廠房需求：約800平方米廠房長度40米
- ◎耗水量：3000公升/小時
- ◎電力需求：25KW
- ◎瓦斯量需求：約23公斤/小時（柴油約28公斤/小時）
- ◎食用油需求：約35公斤/小時
- ◎空壓機需求：2馬力
- ◎人工需求：6人
- ◎原料需求：原料400公斤，比重1.15，糖份小於1%

※上述規格，因改良需求，本公司保有變更權利。

CAPACITY:

- 100 kg/hr, 300 kg/hr, 500 kg/hr
(here is 100 kg/hr line utilities for reference)
- Minimum Factory Layout: about 800m², minimum length 40m
- Water Required: 300 L/hr
- Electric Required: 25 KW
- Gas Required: about 23 kg/hr (If diesel, about 28 kg/hr)
- Edible Oil Required: about 35 L/hr
- Air Compressor: 2 HP
- Labor Required: 6 persons
- Raw Material: 400 kg, density 1.15 Fresh Potato, sugar contain less than 1%

※ The information listed in this catalogue is subject to change for machine developing purpose without prior notice.

特點：

- ◎自動化生產
- ◎操作簡單，維修方便
- ◎大中小產量供選擇
- ◎省人工、省能源
- ◎價格合理、品質卓越

DESIGN FEATURES :

- ◎ Automatic production.
- ◎ Easy to operate and maintain.
- ◎ Flexible capacity for choice.
- ◎ Energy and labor saving.
- ◎ Top quality at affordable price.

